




SAGI DECK

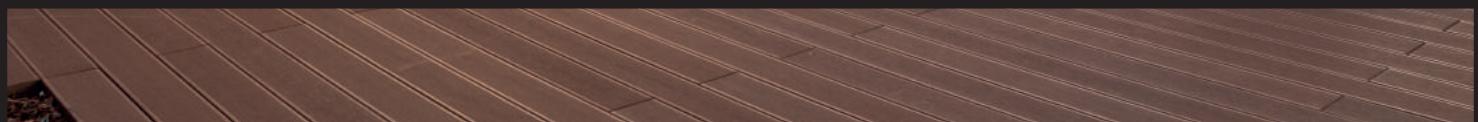

 sagiper

The logo consists of the word "sagiper" in a lowercase, sans-serif font. Above the letter "i", there is a stylized graphic element resembling a wave or a mountain peak, composed of three curved lines in orange, yellow, and green colors.

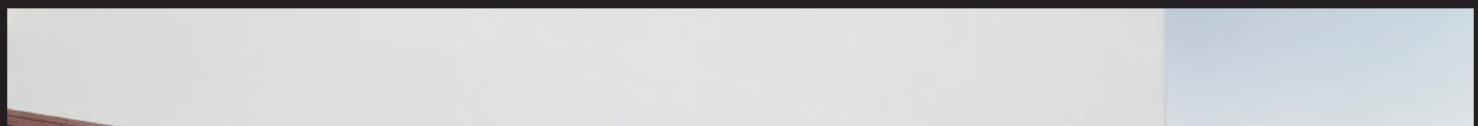

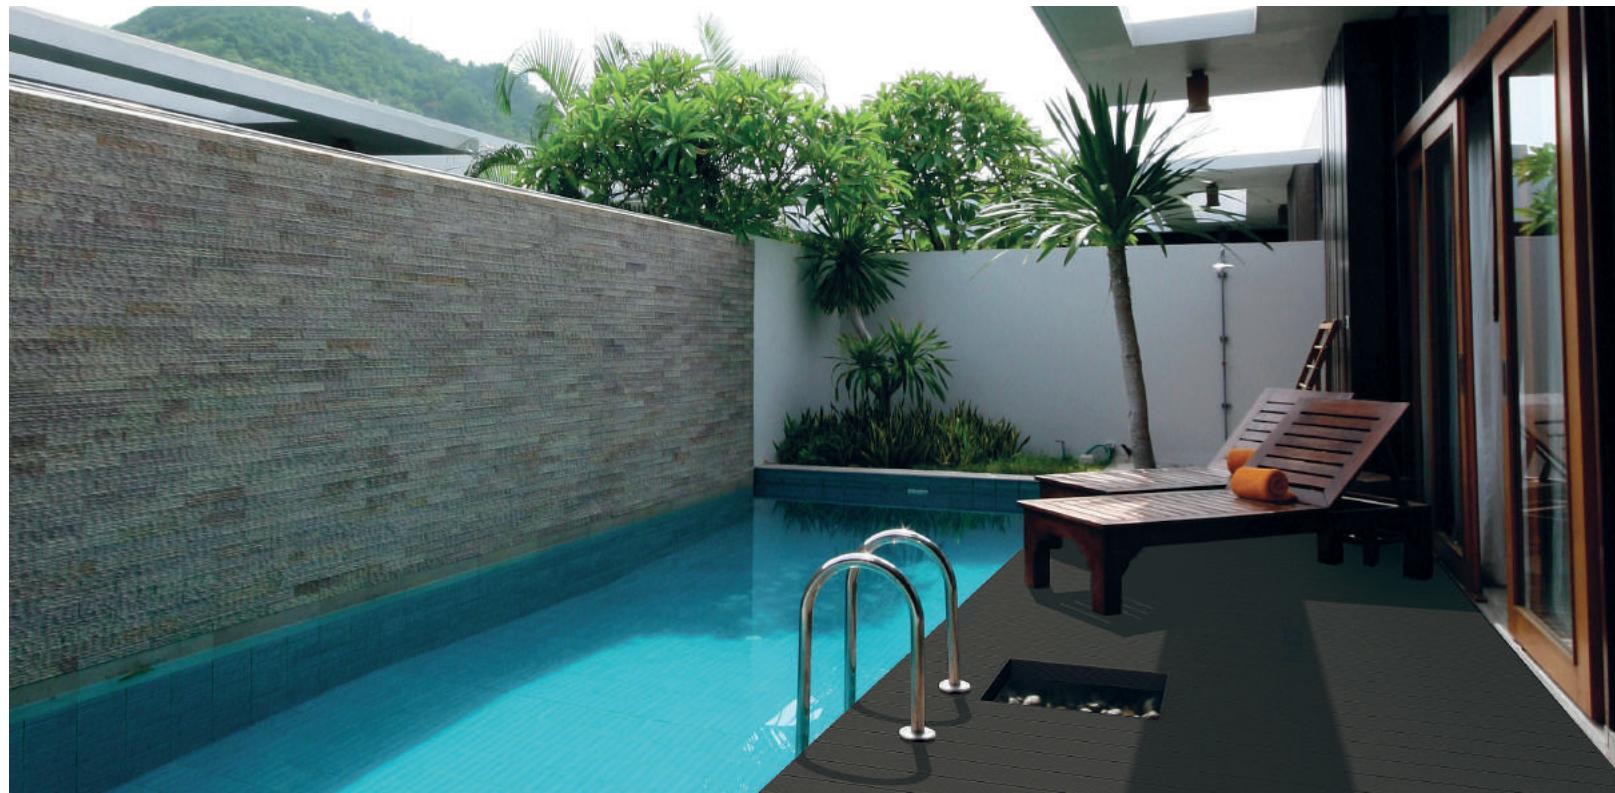

Estilos de vida em harmonia

Lifestyles in harmony

Modes de vie en harmonie

CORES & CONCEITOS . COLOURS & CONCEPTS . COULEURS & CONCEPTS

PT


Com a combinação entre materiais reciclados de madeira com termoplástico, o deck compósito Sagiper, apresenta vantagens competitivas em relação ao seu homónimo proveniente da natureza.


EN

With the combination of recycled wood with thermoplastic composite deck Sagiper, presents competitive advantages over its natural counterpart.

FR

Avec la combinaison entre les matériaux recyclés de bois et thermoplastiques, le Deck composite Sagiper, représente des avantages compétitifs en rapport à son origine naturelle.

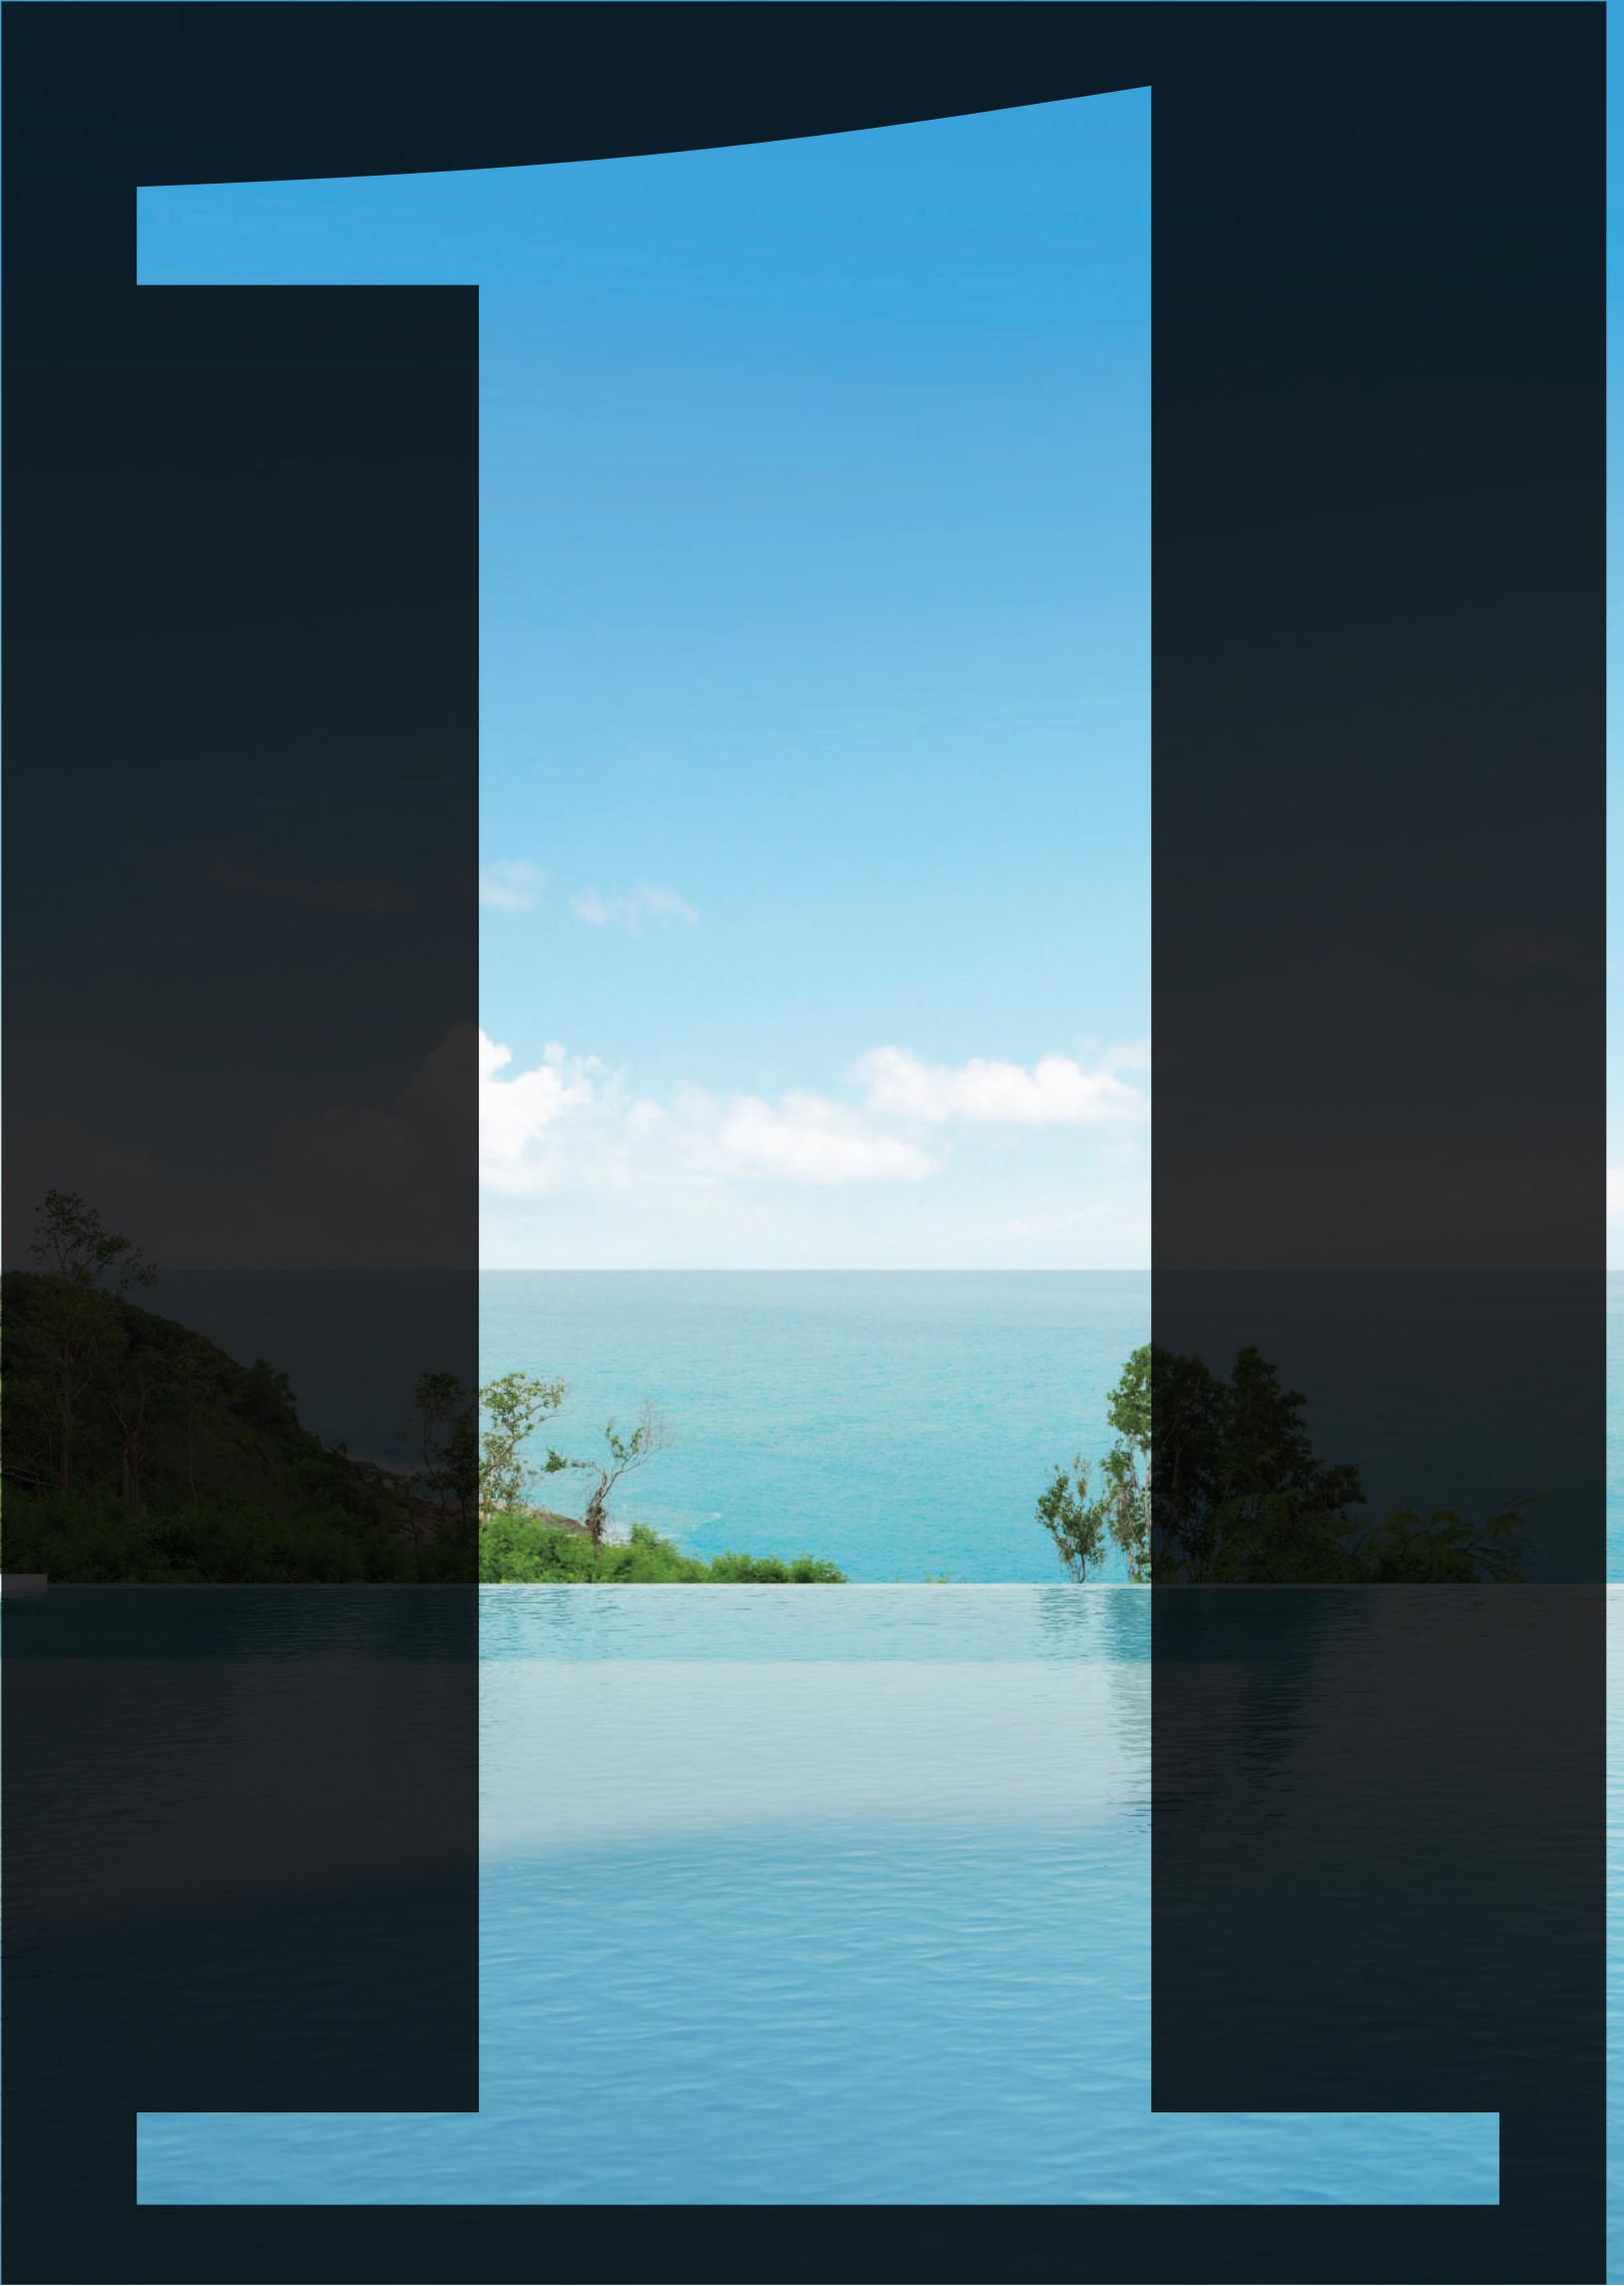

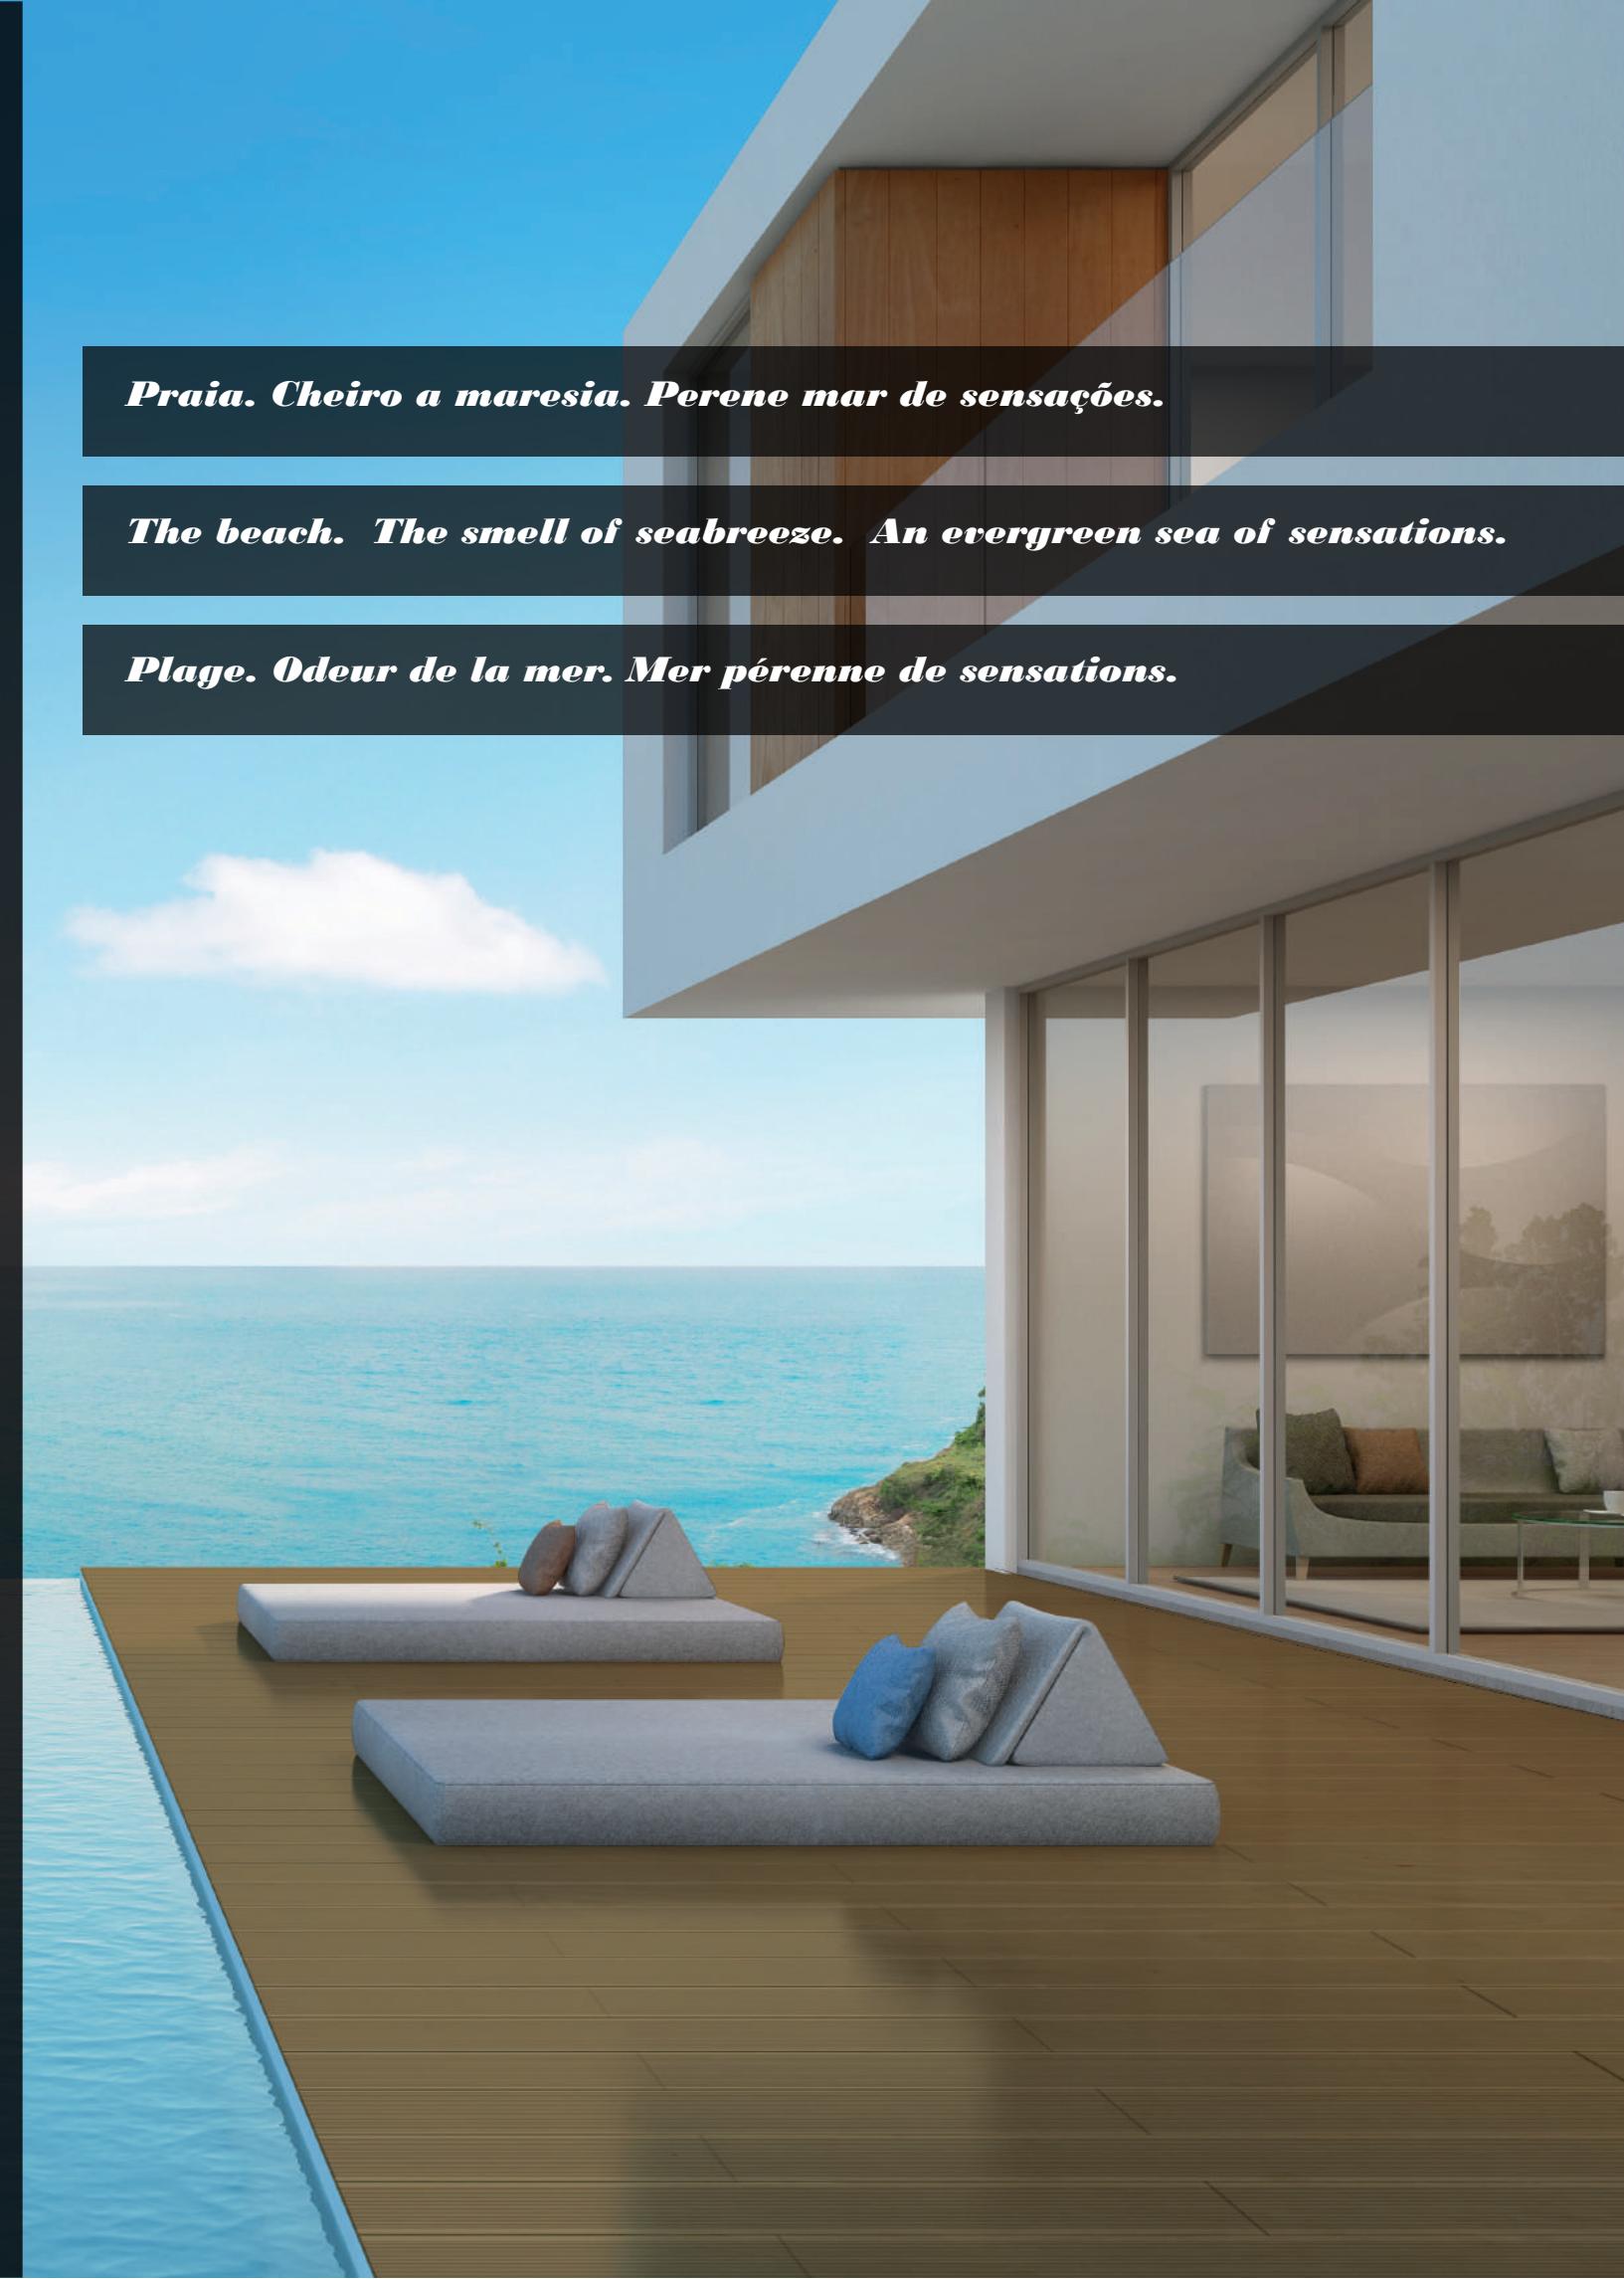
A photograph of a modern beach house. The foreground shows a wooden deck with two light blue lounge chairs. To the left, a portion of a swimming pool is visible. The house features large glass doors that open onto a terrace with a sofa and a view of the ocean and a distant shoreline. The sky is clear and blue.

Praia. Cheiro a maresia. Perene mar de sensações.

The beach. The smell of seabreeze. An evergreen sea of sensations.

Plage. Odeur de la mer. Mer pérenne de sensations.



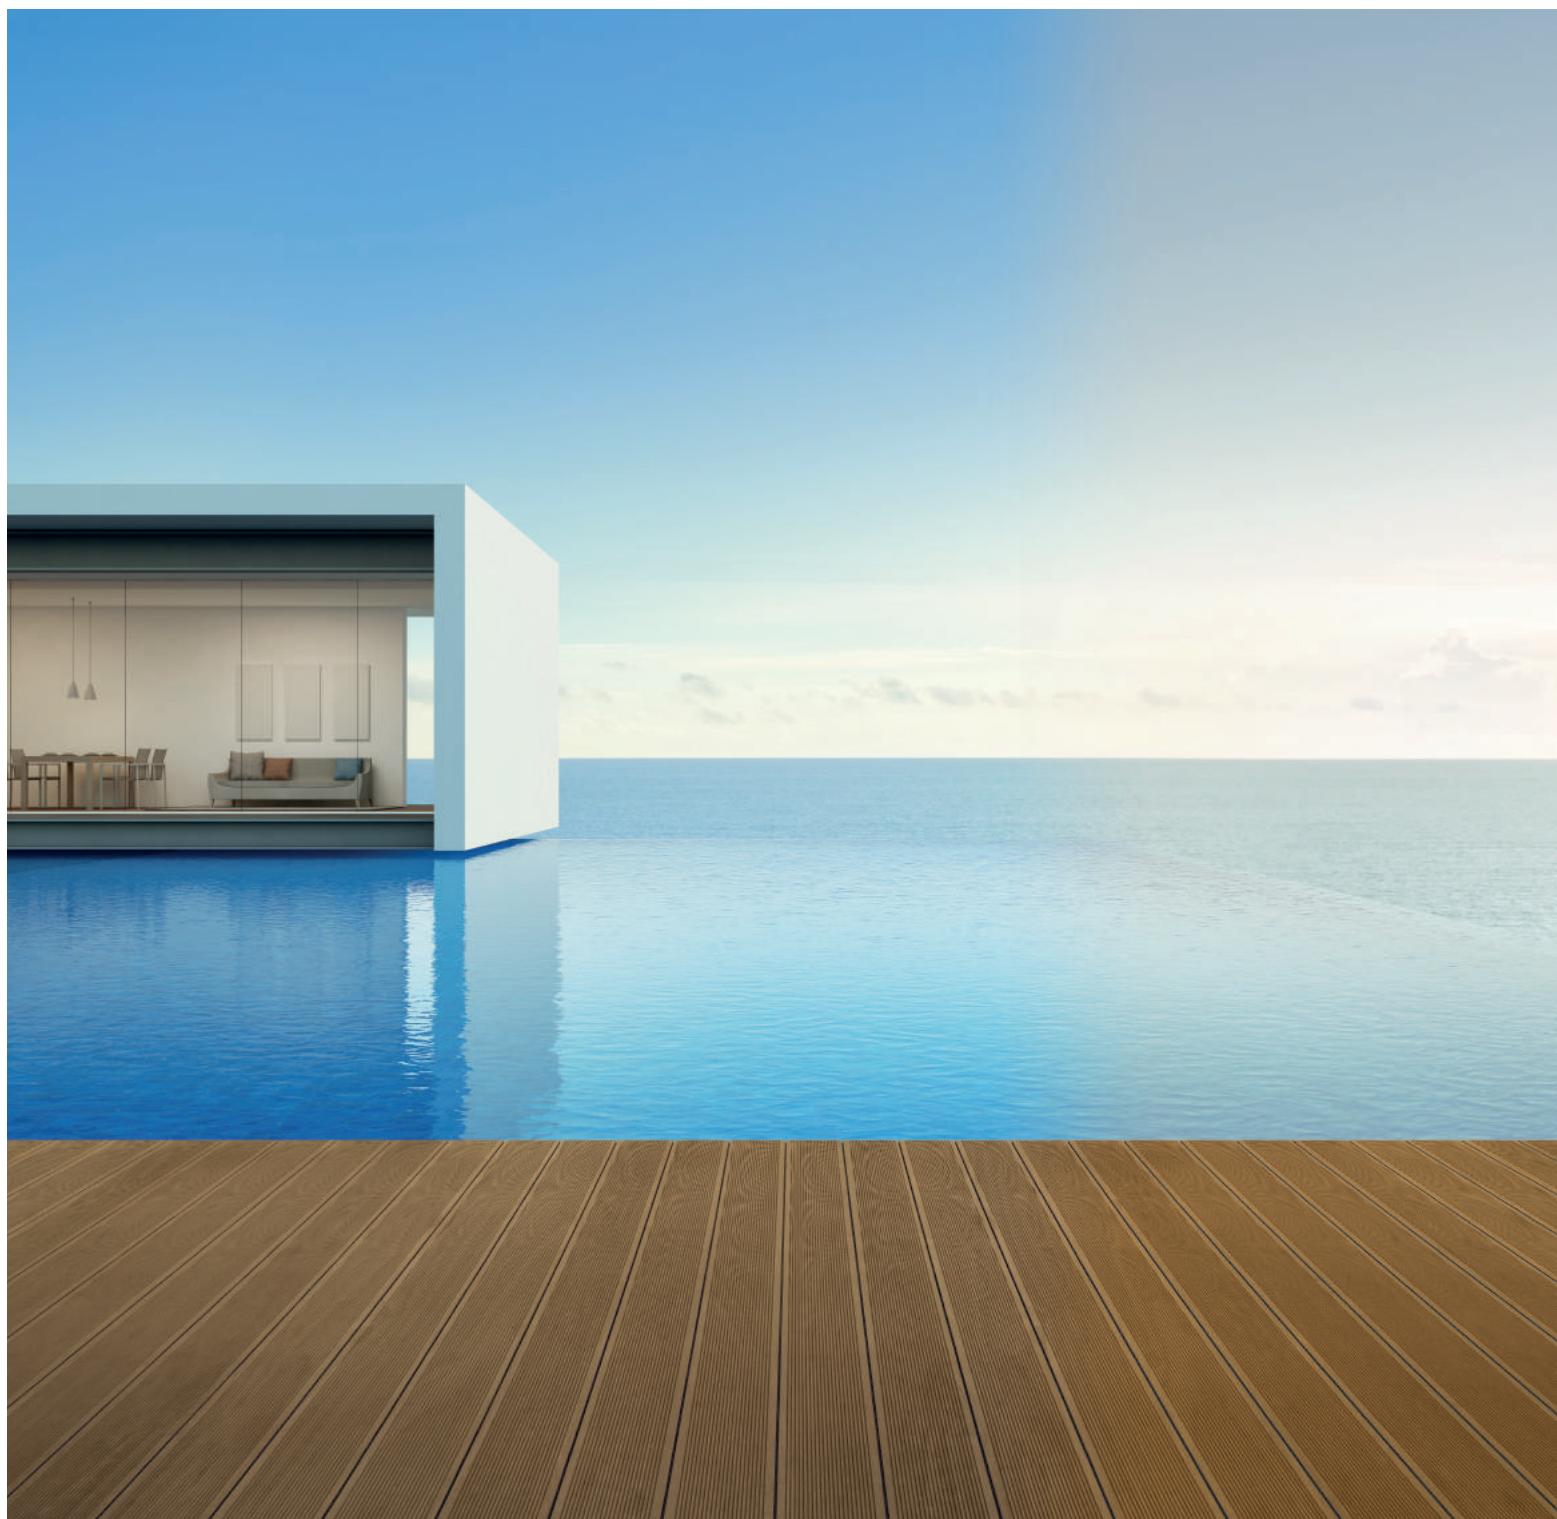




Montanha. Momentos únicos em harmonia plena.

Mountain. Unique moments in pure harmony.

Montagne. Des moments uniques en harmonie.





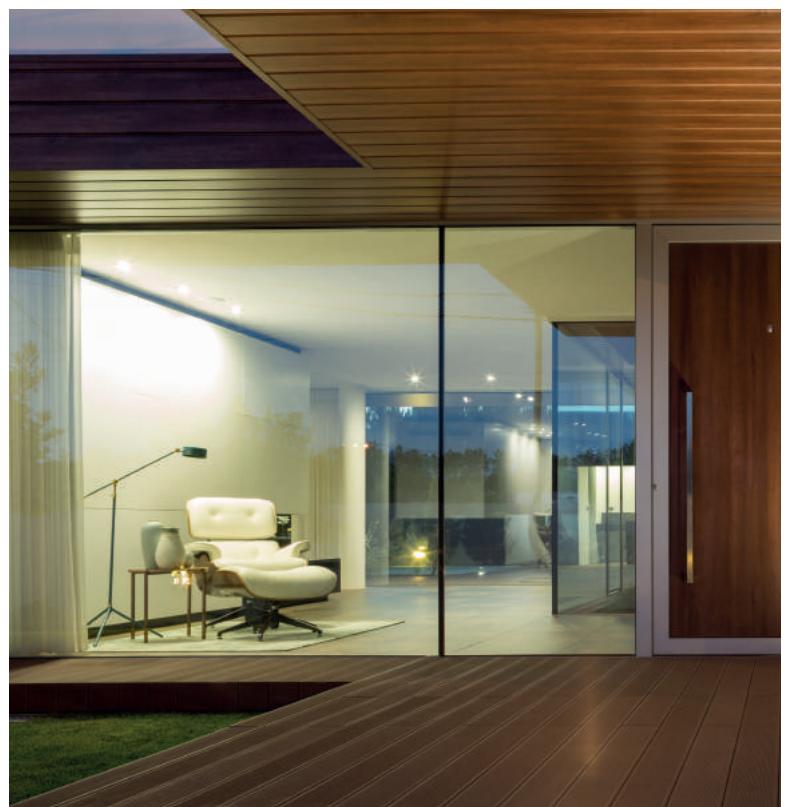





Cidade. Escapes ritmados de bem-estar.



The city. Rhythmic getaways full of well-being.

Ville. Échappe bien rythmée.





SAGI DECK

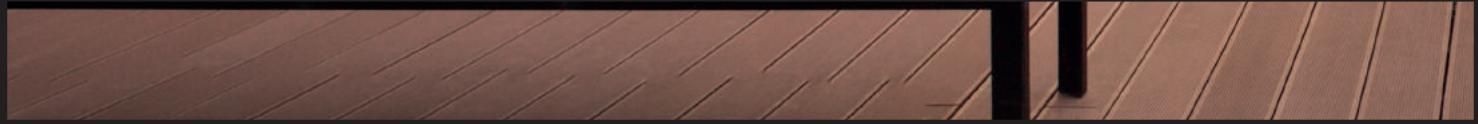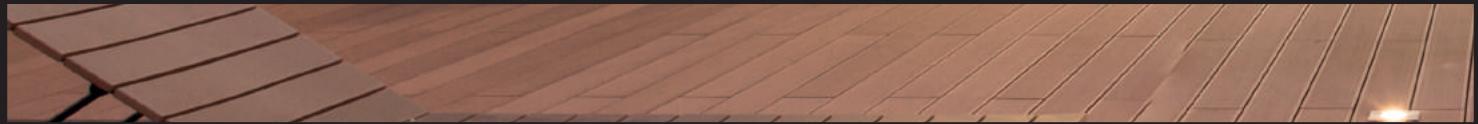

Ficha Técnica

Datasheet

Fiche Technique



PT

CARACTERÍSTICAS TÉCNICAS

- » Aspecto e toque de madeira natural;
- » Fácil aplicação;
- » Elevada resistência aos raios U.V.;
- » Face reversível;
- » Anti-derrapante;
- » Elevada resistência à absorção de água;
- » Reduzida dilatação/ contracção;
- » Dispensa manutenção;
- » 100% ecológico e reciclável;
- » 15 anos de garantia.

EN





TECHNICAL CHARACTERISTICS

- » Look and feel of natural wood;
- » Easy application;
- » High UV resistance;
- » Reversible Face;
- » Anti-slip;
- » High resistance to water absorption;
- » Low expansion/ contraction;
- » No maintenance;
- » 100% recyclable and eco;
- » 15 year warranty.

FR

CARACTÉRISTIQUES TECHNIQUES

- » Aspect et contact du bois naturel;
- » Application facile;
- » Haute résistance aux UV;
- » Réversible;
- » Antidérapante;
- » Haute résistance à l'absorption de l'eau;
- » Dilatation/ contraction réduit;
- » Pas d'entretien;
- » 100% écologique et recyclable;
- » 15 ans de garantie.

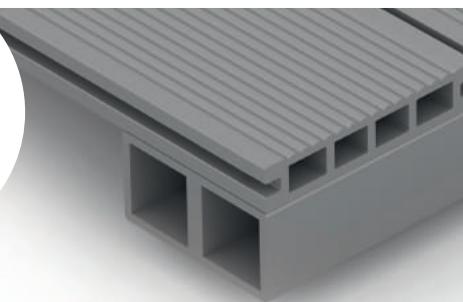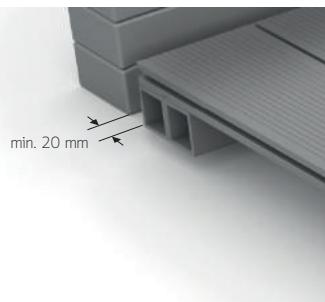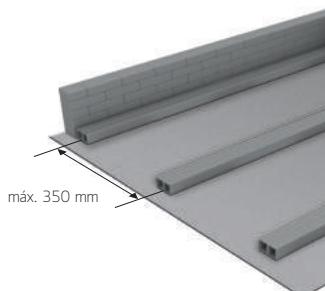

TESTES • TESTS

Coefficiente de expansão linear térmica ASTM D696-08
Coefficient of linear thermal expansion ASTM D696-08
Coefficient linéaire de dilatation thermique ASTM D696-08

56.0 x 10⁻⁶ mm/mm C°

INTERTEK

Absorção de água ASTM D1037-06a
Water absorption ASTM D1037-06a
Absorption d'eau ASTM D1037-06a

imersão por 2 hrs: 0.02%
immersion for 2 hrs: 0.02%
immersion pendant 22 hrs: 0.87%

SGS

Densidade ASTM D792-08
Density ASTM D792-08
Densité ASTM D792-08

1.293 g/cm³

SGS

Resistência à flexão ASTM D6109
Flexural strength ASTM D6109
Résistance à la flexion ASTM D6109

18.6 Mpa

SGS

Modo de elasticidade ASTM D6109
Method of elasticity ASTM D6109
Méthode d'élasticité ASTM D6109

2650 Mpa

SGS

UV escala de cinzas 3000h
UV grayscale 3000h
UV en niveaux de gris 3000h

3-4

TÜV

Resistência à abrasão ASTM D4060-07
Abrasion Resistance ASTM D4060-07
Résistance à l'abrasion ASTM D4060-07

massa perdida após 800 ciclos • lost masse after 800 cycles: 112 mg
massa perdida após 1000 ciclos • lost masse after 1000 cycles: 126 mg

INTERTEK

Coefficiente de fricção ASTM 2394-05
Friction coefficient ASTM 2394-05
Coefficient de friction ASTM 2394-05

paralelo ao comprimento
parallel to length
parallèlement à la longueur
perpendicular ao comprimento
perpendicular to length
perpendiculaire à la longueur

a seco • dry • sec: 0.48

húmido • moist • humide: 0.71

a seco • dry • sec: 0.59

húmido • moist • humide: 0.81

INTERTEK

SAGIDECK


cores disponíveis • colors available • couleurs disponibles



CAMEL 01




CAMEL 02



TEKA 01



TEKA 02




GRANITO 01



GRANITO 02



01

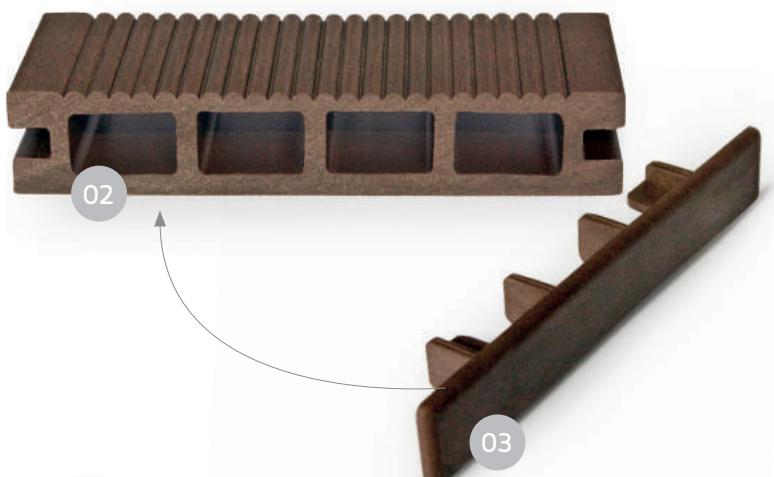

02


03



04



05

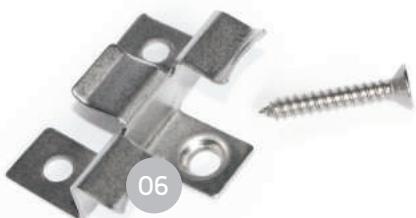

06



07

SAGIDECK

01 SAGIDECK maciço • solid • plein
2200 x 135 x 25 mm

02 SAGIDECK
2200 x 135 x 25 mm

03 tampa • end cap • capuchon
135 x 25 mm

04 rodapé • skirting • plinthe
2200 x 55 x 9 mm

05 sarrago • keel • lambourde
2200 x 50 x 30 mm

06 clip em inox
stainless steel clip
clip en inox

07 clip de arranque em inox
stainless steel start clip
clip de départ en inox



SAGIPER - Produção e comercialização de perfis em PVC, LDA
Zona Industrial de Vagos - Lote 60 - Apt 128 | 3844-909 Vagos - Portugal
T. +351 234 794 214 • F. +351 234 793 175
www.sagiper.com • sagiper@gmail.com

DISTRIBUIDORES • DISTRIBUTORS • DISTRIBUTEURS

SAGIPER NORTH AMERICA
131 79-156 Street NW,
Edmonton, Alberta NW,
Canada

T. 1 780 482 3445 | F 1 888 890 7069
www.sagipernorthamerica.com • info@sagipernorthamerica.com

Matermoz, Lda.
Rua do Mozal
Matolaria - Maputo
Moçambique

T. 0025 884 469 620 4